


EM 1000, 2000

TWO STAGE, CENTRIFUGAL, MIDSHIP MOUNTED

AVAILABLE WITH HIGH PRESSURE PUMP

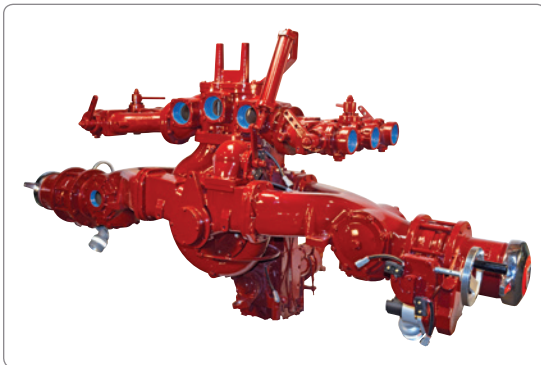

DIMENSIONS & WEIGHT

- 44" L x 84" W x 39" H, 1400 lbs. (636 kg)

APPLICATIONS

- Pumper, pumper tanker

STANDARD FEATURES

- 4 - 2 1/2" NH, 1/4 turn, ball self-locking valves and caps, 2 each side
- 2 - 5" or 6" NH suction adapters and caps
- 1610 or 1710 full round yokes standard
- Air shift

OPTIONS

- Available as a EMH high pressure pump
- Available as single stage design

PERFORMANCE

EM 1000

- 1000 gpm (3785 L/M) @ 150 psi (10.3 bar)
- 700 gpm (2646 L/M) @ 200 psi (13.8 bar)
- 500 gpm (1893 L/M) @ 250 psi (17.2 bar)
- 100 gpm (378 L/M) @ 500 psi (34.5 bar)

EM 2000

- 2000 gpm (7570 L/M) @ 150 psi (10.3 bar)
- 1400 gpm (5299 L/M) @ 200 psi (13.8 bar)
- 1000 gpm (3785 L/M) @ 250 psi (17.2 bar)
- 100 gpm (378 L/M) @ 500 psi (34.5 bar)

EM 2ND STAGE

- 600 gpm (2271 L/M) @ 600 psi (41.3 bar)
 - 800 gpm (3028 L/M) @ 600 psi (41.3 bar)*
- *Above performance requires 500 hp engine

EM 3RD STAGE

- 100 gpm (378 L/M) @ 1300 psi (89.6 bar)
 - 200 gpm (757 L/M) @ 1000 psi (68.9 bar)
- Fed from Series Mode

- 100 gpm (378 L/M) @ 600 psi (41.3 bar)
 - 200 gpm (757 L/M) @ 500 psi (34.5 bar)
- Fed from Parallel Mode

